



I330

330 Ah | 6 V | 100 h

Specifications

Voltage	6V
Capacity @ C ₁₀₀	330Ah
Cold cranking amps CCA @ -17°C	844
Marine cranking amps MCA @ 0°C	1055
Reserve capacity @ 25 A	642min
Reserve capacity @ 75 A	175min

Charging and Discharging


Capacity C ₁₀₀	330Ah
Capacity C ₂₀	300Ah
Capacity C ₁₀	264Ah
Capacity C ₅	237Ah
Charge voltage range @25°C	2.45 to 2.5 V/cell
Self-discharge range @ 25°C	5 to 10% per month
Float voltage range @ 25°C	2.25 V/cell

Mechanical Specifications


Measurements (L x B x H)	311 x 181 x 362mm
Weight	44kg
Terminal type	DT
Case material	Polypropylene
Lid material	Polypropylene
Cells	3
Plates per cell	17

Temperature Specifications

Normal operating temperature	25°C ± 5°C
Discharge temperature	-15°C to 50°C
Charge temperature	0°C to 40°C
Storage temperature	-15°C to 50°C

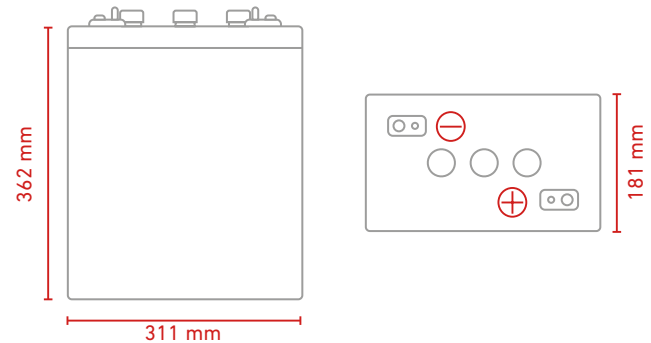

Discharge Characteristics Curve

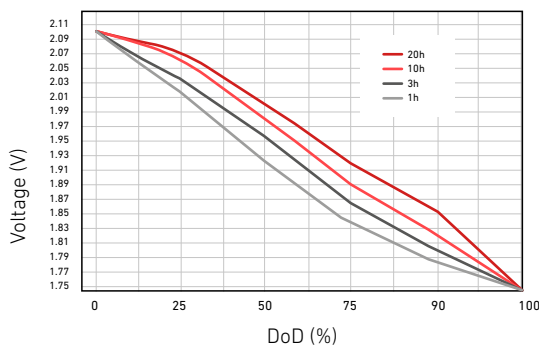

Cycle Life in Relation to Depth of Discharge

