



# YTX4L-BS

5 Ah | 12 V | 55 A



## Electrical Specifications

Nominal voltage	12 V
Nominal capacity (25 °C)	4 Ah @10 hrs / 55 A
CCA -18 °C	55 A


Retention of Charge During Storage @ 25 °C		
1 month	97 %	Directly mounted
3 months	90 %	Directly mounted
6 months	80 %	Constant voltage: 14.4 V Limit current: 0.8 A Charging time: 2 - 3 hrs
12 months	40 %	Constant voltage: 14.4 V Limit current: 0.8 A Charging time: 4 - 6 hrs

## Mechanical Specifications

Measurements (L x W x H)	113 x 70 x 85 mm
Approx. weight	1.4 kg
Cover	PP
Terminal	C3 (Cu)
Container bottom	PP
Positive plate	PbO <sub>2</sub>
Negative plate	Pb
Separator	AGM
Electrolyte	Diluted sulphuric acid
Safety valve	Rubber
Explosion plate	PP
Way of sealing	Heat sealing



## Discharge Current 25 °C

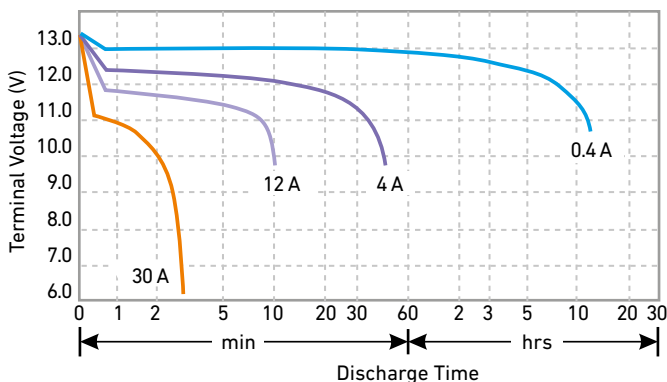

## Residual Capacity

