



YTX7L-BS

7 Ah | 12 V | 130 A




Electrical Specifications

Nominal voltage	12 V
Nominal capacity (25 °C)	7 Ah @10 hrs / 130 A
CCA -18 °C	130 A


Retention of Charge During Storage @ 25 °C		
1 month	97 %	Directly mounted
3 months	90 %	Directly mounted
6 months	80 %	Constant voltage: 14.4 V Limit current: 1.2 A Charging time: 2 - 3 hrs
12 months	40 %	Constant voltage: 14.4 V Limit current: 1.2 A Charging time: 4 - 6 hrs

Mechanical Specifications

Measurements (L x W x H)	113 x 70 x 132 mm
Approx. weight	2.15 kg
Cover	PP
Terminal	C3 (Cu)
Container bottom	PP
Positive plate	PbO ₂
Negative plate	Pb
Separator	AGM
Electrolyte	Diluted sulphuric acid
Safety valve	Rubber
Explosion plate	PP
Way of sealing	Heat sealing



Discharge Current 25 °C

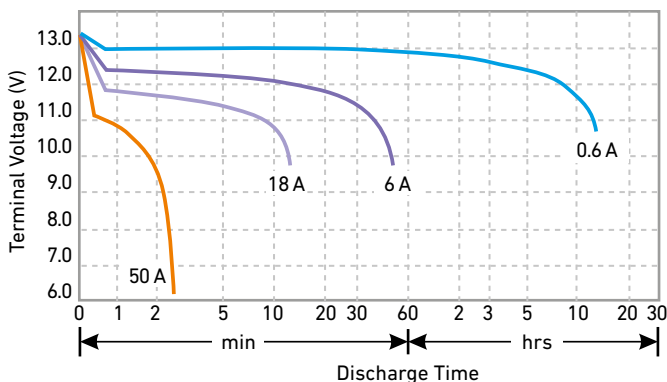

Residual Capacity

