



YTZ10-S

9 Ah | 12 V | 130 A


Electrical Specifications

Nominal voltage	12 V
Nominal capacity (25 °C)	9 Ah @10 hrs
CCA -18 °C	130 A


Retention of Charge During Storage @ 25 °C		
1 month	97 %	Directly mounted
3 months	90 %	Directly mounted
6 months	80 %	Constant voltage: 14.4 V Limit current: 1.72 A Charging time: 2 - 3 hrs
12 months	40 %	Constant voltage: 14.4 V Limit current: 1.72 A Charging time: 4 - 6 hrs

Mechanical Specifications

Measurements (L x W x H)	150 x 87 x 94 mm
Approx. weight	2.85 kg
Storage status	Wet
Cover	ABS
Terminal	Z1 (Cu)
Container bottom	ABS
Positive plate	PbO ₂
Negative plate	Pb
Separator	AGM
Electrolyte	Diluted sulphuric acid
Safety valve	Rubber
Way of sealing	Epoxy Resin

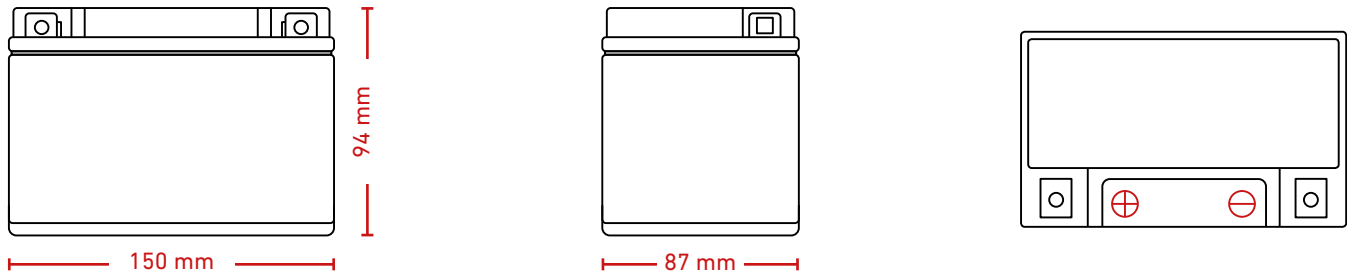

Discharge Current 25 °C

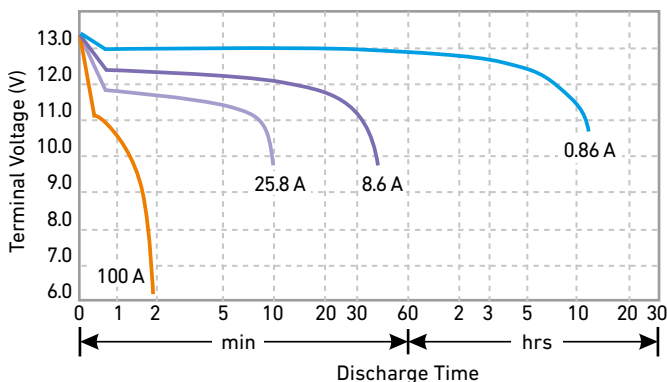

Residual Capacity

